



The Quality Profile



SOFTLINE AD58

Type	Casement
System Depth	58 mm
U-Value	$U_f=1.8 \text{ W/m}^2\cdot\text{K}$

SOFTLINE AD58

VEKA SOFTLINE AD58 casement system is a 3-chamber system with 58mm installation depth.







VEKA has extruded this system since 25 years and counting. This very versatile and complete system is the all-round solution for all window and door needs – inward as well as outward opening window and door systems. It is most suitable for regions with lesser insulation requirements of U_w 2.2 W/m²·K and above. AD58 is especially popular in our export markets in South East Asia, Middle East and Africa.


- ◆ System U_f 1.8 W/m²·K (including steel reinforcements)
- ◆ System depth 58mm – 3 chambers
- ◆ Glazing width range from 4mm – 33mm
- ◆ Glazing depth 18mm
- ◆ Available in profile wall thickness “Class A” and “Class B”

U-Values by Glass configuration


U-Value	Glass Thickness	Glass Configuration	Glass U-Value
1.8 W/m ² ·K	22/24 mm	5ssLow-E+12/14Ar+5	1.50 W/m ² ·K
2.0 W/m ² ·K	22/24 mm	5ssLow-E+12/14A+5	1.75 W/m ² ·K
2.1 W/m ² ·K	33 mm	5+9A+5+9A+5	1.87 W/m ² ·K
2.2 W/m ² ·K	19 mm	5ssLow-E+9A+5	2.0 W/m ² ·K
2.5 W/m ² ·K	22/24 mm	5+12/14Ar+5	2.5 W/m ² ·K

Color options

Standard White		White				
Laminated						
	moss green	dark oak	golden oak	mahoganny	dark grey	

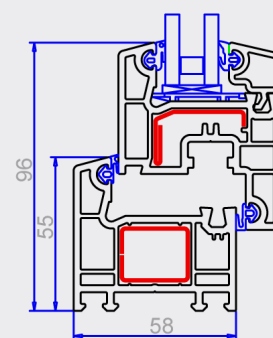

↑ Window standard

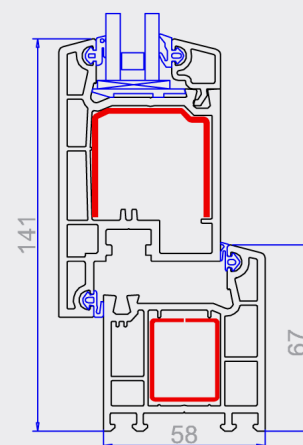

↑ Door standard

VEKA Plastics (Singapore) Pte. Ltd.
 10 Anson Road, #15-08
 International Plaza
 Singapore 079903
 T: +65 6324 1533
 E: infoasia@veka.com
 W: www.veka-system.com



Beijing - Grand Epoch City Hotel

Beijing Grand Epoch City Hotel is the center part of a newly developed amusement park in the suburbs of Beijing – the design is inspired by traditional Chinese architecture. The VEKA SOFTLINE AD58 system window with red lamination foil outside delivered a modern uPVC window system and at the same time preserved the typical traditional Chinese architecture feeling.

Product	SOFTLINE AD58
U_f	1.8 W/m ² ·K
Glass Configuration	5ssLow-E + 9A + 5
U-Value	2.2 W/m ² ·K

